




A RADAR FOR YOUR MOBILE.

BRADY EXA81 RFID Reader

A practical mobile add-on

Find without searching

No line of sight required



EMPOWER YOUR PHONE



MOUNT ANY SMARTPHONE OR TABLET



CONNECT WITH BLUETOOTH OR USB



HOME IN ON ANY ITEM

Your phone. Your apps.

Find any RFID-labelled asset in seconds.

- ▶ read 1000+ items per second within 15 metres
- ▶ read UHF RFID, barcodes and 2D codes
- ▶ use 24 hours on a single charge
- ▶ link up via Bluetooth 5.3 or USB-C
- ▶ universal mounting with screws or Quadlock
- ▶ fast scanning with ergonomic pistol grip

The EXA81

ONE SWEEP.
ALL ASSETS.



Full stocks for sale

- ▶ See all items in 15 metres in 1 second
- ▶ Gain real-time inventory visibility
- ▶ Restock efficiently






Home in on flagged assets

- ▶ See all assets within 15 metres
- ▶ Filter maintenance ready assets
- ▶ Select and home in for interventions



Process orders faster

- ▶ See picking list items within 15 metres
- ▶ Home in with sounds and visuals
- ▶ Check inventories while walking

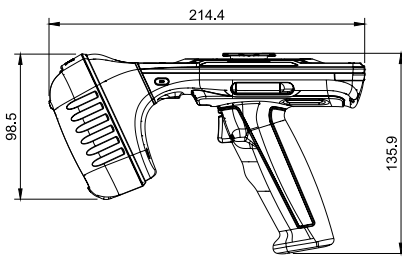

UHF RFID IDENTIFICATION	
ISO Compliance Standards	ISO 18000-63 (EPC Class 1Gen2v2)
Frequency	ETSI 865.6-867.6 MHz or FCC/IC 902-928 MHz
RF Radiated Power	Max. ERP 2 W (33dBm) / EIRP 3.3 W (35.2dBm)
Maximum Receive Sensitivity	-85dBm
Reading Speed	Up to 1000 tags per second
Antenna Features	Gain 5dBi with software-controlled polarisation switching
BARCODE IDENTIFICATION	
Bar Code Type	Code 11, Code 39, Code 93, Code 128, GS1-128, GS1 DataBar, Interleaved 2 of 5, Codabar (NW-7), MSI, Plessey, Telepen, China Post, POSTNET, EAN/UPC, JAN-13, JAN-8, Industrial 2 of 5, ISBN-ISSN-ISMN, S-code, Aztec, Data Matrix, GS1 DataMatrix, MaxiCode, PDF417, MicroPDF417, QR code, Aztec Runes, Chinese Sensible Code, Composite Code, Passport MRZ
USER INTERFACE	
Device Indicators	Buzzer for sound indications, Power LED, Connection LED, Scan LED, Segmented LED bars
User Interface Type	Buttons
CONNECTIVITY	
Connectivity Options	Bluetooth 5.3 class 2, USB-C
PLATFORM	
Operating System	Brady by Nordic ID IoT platform (2nd generation)
RFID Capabilities	UHF
SIZE AND WEIGHT	
Weight (kg)	0.580 kg
Dimensions	214.4 mm (W) x 98.5 mm (H) x 86 mm (D)
ENVIRONMENT	
Ingress Protection Rating	IP65
Operating Temperature	-20°C - 55°C
Storage Temperature	-20°C - 60°C
Charging Temperature Range (°C)	0° - 45°C
Drop Test	Resistant to 1.8 metre drops
ESD	Contacts: +/-4kVdc, Air discharge: +/-8kVdc
Mounting Type	Quad Lock, Screws
POWER	
Shipped With Battery	Yes
Battery Type	Lithium-ion Battery
How Is Battery Shipped	Shipped installed in equipment
Battery mAh Rating	10050 mAh
Charging Times	Charging over cradle (0 - 100 %) 4 h, Charging over USB-C connector (0 - 100 %) 4-10 h

Article No.	Description
321710	Brady EXA81 RFID Reader EU
321711	Brady EXA81 RFID Reader US
321712	Brady EXA81 RFID Reader AU

Accessories

Article No.	Description
309995	HH83 - HH85 Desktop Charger Kit
310986	Adapter QuickCharge3 USB-C kit EU/UK/US
311030	HH83 Desktop Charger Kit Spare Batt UK
311032	HH83 4-Bay Desktop Charger 4 Batt slots EU
311033	HH83 4-Bay Desktop Charger 4 Batt slots UK
320057	Brady HH85 Battery 10050mAh Pistol grip cover
321899	Quad lock Universal Adaptor for EXA31 and EXA81