

> **Features**

- Compact design and small dimensions
- Read range*: up to 1 m (* depending on tag properties, environment and requirements)
- Various transponder types possible to use
- Integration possible in applications where space is limited
- Use in transition range between near field and far field application
- Suitable for use in industrial environments, suitable for bulk and single tag applications
- High IP67 degree of protection, suitable for outdoor use



> **General specifications**

Order No.		52010172
Type		S-MIRA-100-circular-ETSI-FCC
Frequency range	[MHz]	865-928
©KRAI		-
Polarization		circular
Antenna gain	[dBiC]	-12 (at 866 MHz) -10 (at 915 MHz)
Axial ratio	[dB]	typ. 2
VSWR		typ. 1.4:1
Front-to-back ratio	[dB]	> 8
Impedance antennaport	[Ohm]	50
Max. input power	[dBm]	+30 (at antenna port)
Far field half-power beam width (if mounted like picture)	[°]	100
Connection		TNC female
Weight	[kg]	0.32
Degree of protection		IP67
Operating temperature range	[°C]	-20 to +55
Storage temperature range	[°C]	-40 to +85
Dimensions (L x W x H)	[mm]	156 x 143.8 x 36
Packing size (L x W x H)	[mm]	approx. 230 x 160 x 81
Material		
Antenna cover		tough, weather-resistant polymer blend, colour: RAL7045

> **Remarks**


Mounting options

- Four through-holes Ø 4.2 mm for M4 screws

Accessories optional

- All accessories can be found at: <https://http://www.kathrein-solutions.com/products/hardware/accessories>

➤ **Dimensions [mm]**

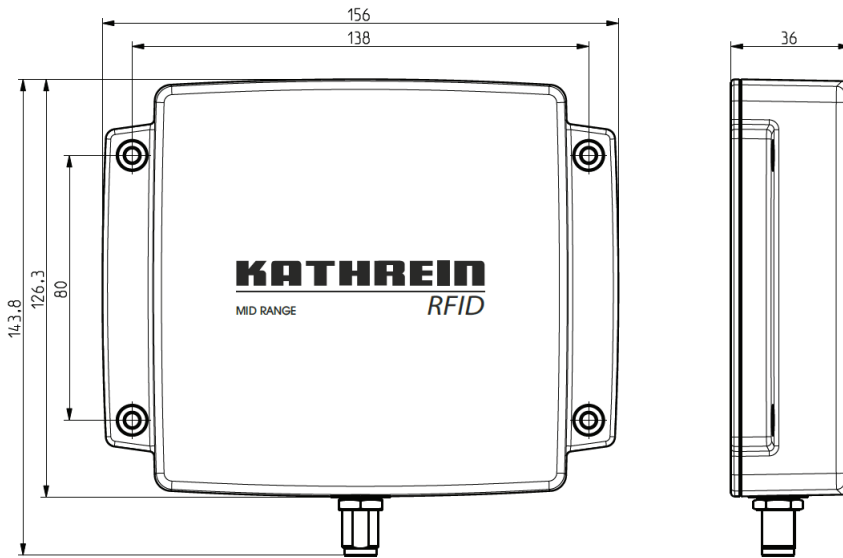

Description

The mid-range antenna (MIRA) was developed for applications in range between the near and far field. The focus of the compact design was for integration in space-critical applications. Reading distances of up to 5 m are still possible with dimensions of 143.8 x 156 mm. In this case, however, the reading range is very wide.

In most cases the MIRA is used for reading distances up to 2 m, for which it features sufficient selectivity. Therefore, this antenna design is especially suitable for applications in the so-called transition area with different tag types.

Key Application

Logistics applications: installing to corridor conveyor vehicles

Materials handling applications

Gate applications for goods registration

Bulk and single tag applications

Access systems (e.g. ski lifts, control systems for tickets)